

Technical Data Sheet

SCM20PSL Pro MkII: High Performance 2-way Passive Loudspeaker


Loudspeaker Technology Ltd
Gypsy Lane
Aston Down
Stroud
Glos
GL6 8HR
England

Tel: +44 (0)1285 760561
Fax: +44 (0)1285 760683
email: info@atc.gb.net



Key Features

- Compact very high performance 2-way studio monitor
- Ideally suited to:
 - critical near-field listening applications in all control rooms
 - LCR surround monitoring in small-to-medium control rooms
 - surround channels in medium-to-large control rooms
- Proprietary ATC 150mm/6" Super Linear Mid/Bass Driver
- Proprietary ATC 25mm/1" Super Dual Suspension Tweeter
- 6 year product warranty

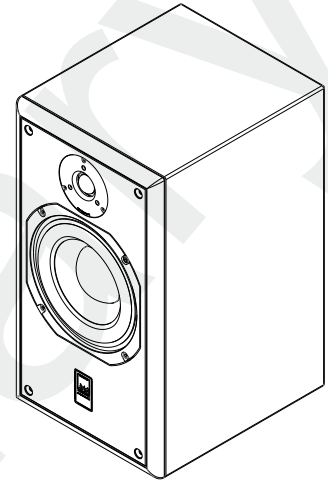

Specifications

- Drive unit - Low Frequency (LF) 6.5"/150mm Super Linear with 75mm/3" voice coil (SB75-150SL 8 Ohm)
- Drive unit - High Frequency (HF) 1"/25mm dual suspension Soft Dome (SH25-76S 6 Ohm)
- Amplitude linearity 80Hz - 20kHz (+/-2dB)
- Cut-off frequencies 55Hz - 25kHz (-6dB freestanding)
- Horizontal dispersion +/-80° coherent
- Vertical dispersion +/-10° coherent
- Maximum continuous SPL 108dB (per pair @ 1m)
- Crossover frequency 2.5kHz
- Recommended Power Amplifier 75 to 300 Watts
- Nominal Impedance 8 Ohm
- Connectors Binding Posts/4mm Plugs, bi-wire
- Accessories K&M 24120 Wall Mount (cabinet requires modification to accept 'top-hat' mount)
- Cabinet Dimensions (HxWxD) 450x250x294mm
- Weight 18kg/39.7lbs (per cabinet)

